

General Notes :

Lid Wt = 3,438 Lbs.
 Tank Wt = 8,478 Lbs.
 Total Wt = 11,916 Lbs.

Concrete Plug = 162 Lbs.
 (In Lid)(1.08 Cu/Ft)

Concrete Mix:
 Grey Concrete
 GRT Fibrillated Fiber
 1.5 lbs. per Cu/Yd

HEIGHT

CUBIC FEET

Rebar
 "A" Anchor


Lid 22.92
 Tank 56.52

Lid 6
 Tank 2

STR. #

DATE :
 06-08-2017

PG. NO.

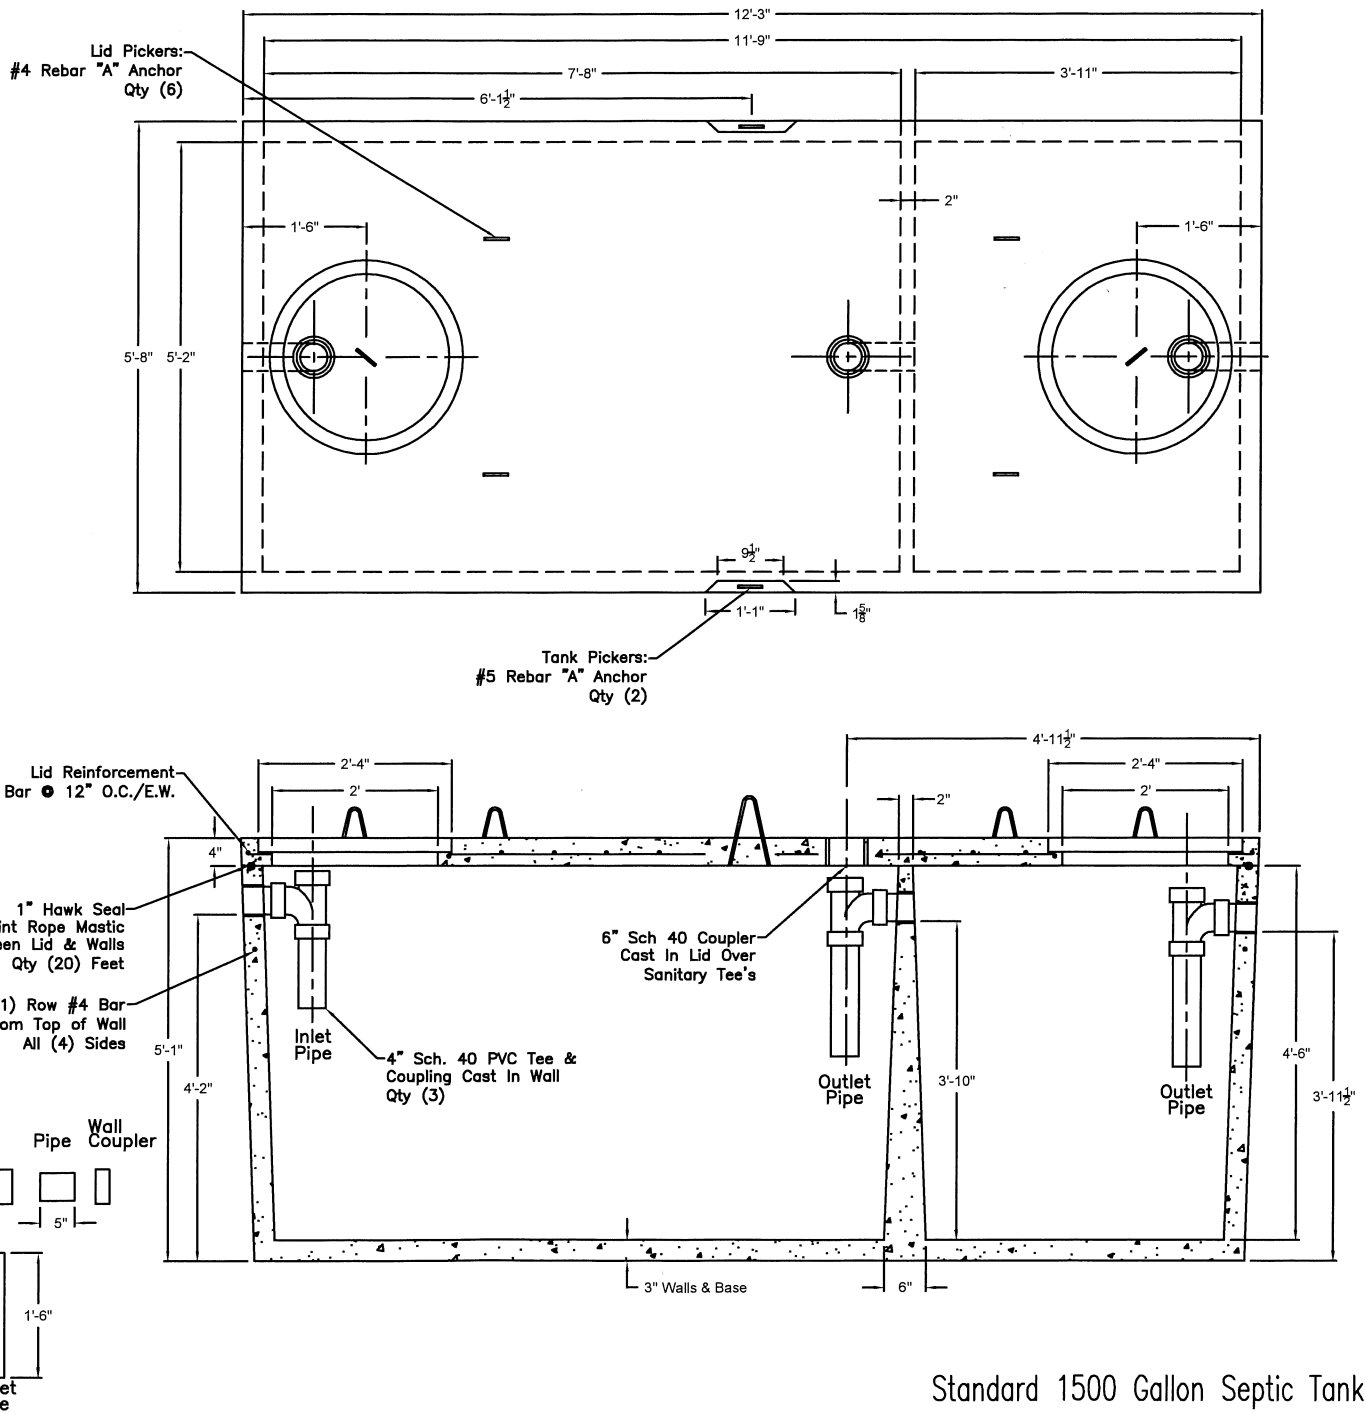

Standard 1500 Gallon Septic Tank

JOB:

CONT.

MID AMERICA PRECAST INC.